



US009340178B1

(12) **United States Patent**  
**Khaykin et al.**

(10) **Patent No.:** **US 9,340,178 B1**  
(45) **Date of Patent:** **May 17, 2016**

(54) **ADHESIVE VEHICLE FRONT END FOR MITIGATION OF SECONDARY PEDESTRIAN IMPACT**

(71) Applicant: **Google Inc.**, Mountain View, CA (US)  
(72) Inventors: **Alex Khaykin**, San Francisco, CA (US);  
**Daniel Lynn Lerner**, San Jose, CA (US)  
(73) Assignee: **Google Inc.**, Mountain View, CA (US)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **14/539,533**

(22) Filed: **Nov. 12, 2014**

**Related U.S. Application Data**

(60) Provisional application No. 61/911,853, filed on Dec. 4, 2013.

(51) **Int. Cl.**  
**B60R 21/34** (2011.01)  
**B60R 21/00** (2006.01)

(52) **U.S. Cl.**  
CPC ..... **B60R 21/34** (2013.01); **B60R 2021/0004** (2013.01); **B60R 2021/346** (2013.01)

(58) **Field of Classification Search**  
CPC .. **B60R 21/00**; **B60R 21/34**; **B60R 2021/003**;  
**B60R 2021/0037**; **B60R 2021/343**; **B60R 2021/346**

See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

|                   |        |                 |            |
|-------------------|--------|-----------------|------------|
| 6,447,049 B1 *    | 9/2002 | Tohda et al.    | 296/180.1  |
| 6,746,074 B1 *    | 6/2004 | Kempf et al.    | 296/187.04 |
| 7,757,804 B1 *    | 7/2010 | Li              | 180/274    |
| 8,191,666 B2      | 6/2012 | Suzuki et al.   |            |
| 2004/0130167 A1 * | 7/2004 | Mori et al.     | 293/102    |
| 2006/0186702 A1 * | 8/2006 | Kisanuki et al. | 296/187.04 |
| 2010/0108424 A1 * | 5/2010 | Suzuki et al.   | 180/232    |

**FOREIGN PATENT DOCUMENTS**

|    |              |        |
|----|--------------|--------|
| DE | 2804400      | 8/1979 |
| DE | 10059206     | 7/2002 |
| EP | 1476334      | 3/2007 |
| JP | 08183423 A * | 7/1996 |
| JP | 2009166548   | 7/2009 |

**OTHER PUBLICATIONS**

Machine Translation of JP08-183423. Retrieved Jun. 28, 2015.\*

\* cited by examiner


*Primary Examiner* — Barry Gooden, Jr.

(74) *Attorney, Agent, or Firm* — McDonnell Boehnen Hulbert & Berghoff LLP.

(57) **ABSTRACT**

A system for protecting a colliding object from a secondary impact, after an initial impact with a vehicle, including a vehicle having a front end, an adhesive layer positioned on the front end of the vehicle, a coating positioned over the adhesive layer, wherein, upon the initial impact between the colliding object and the vehicle, the coating is broken exposing the adhesive layer to adhere the colliding object to the adhesive layer during the initial impact.

**19 Claims, 7 Drawing Sheets**

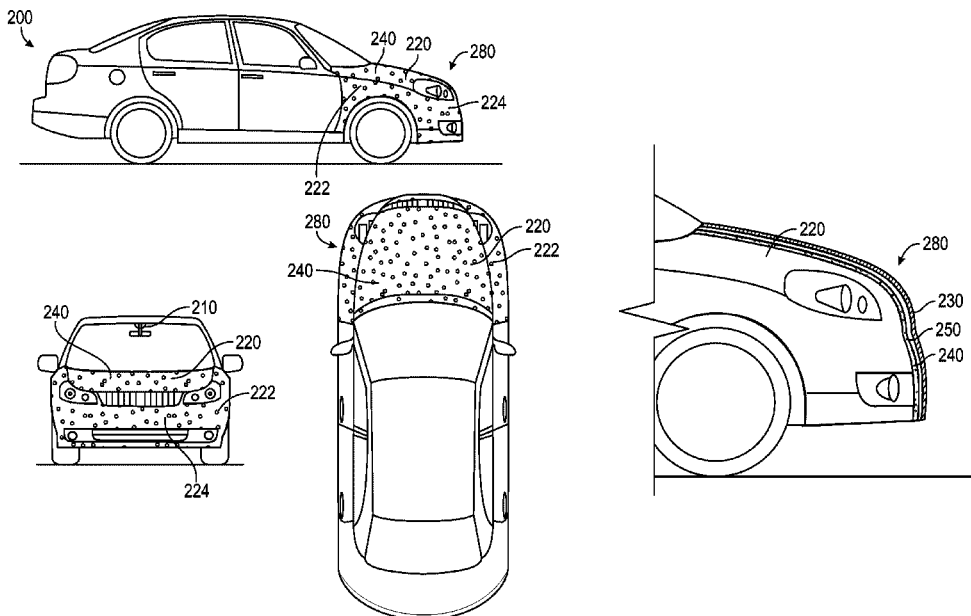

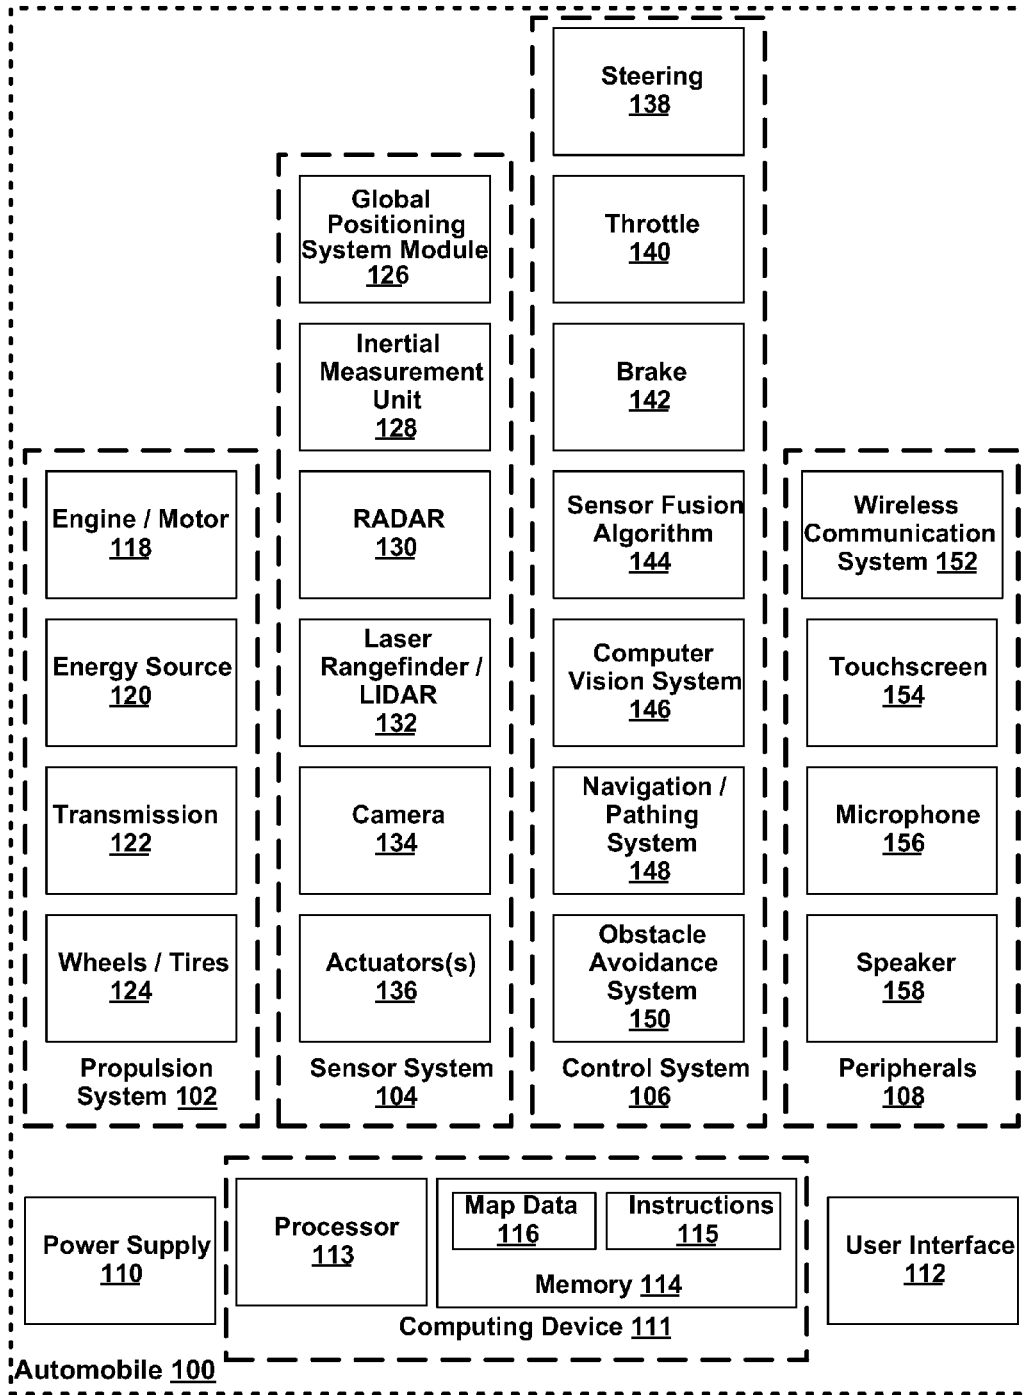


FIG. 1

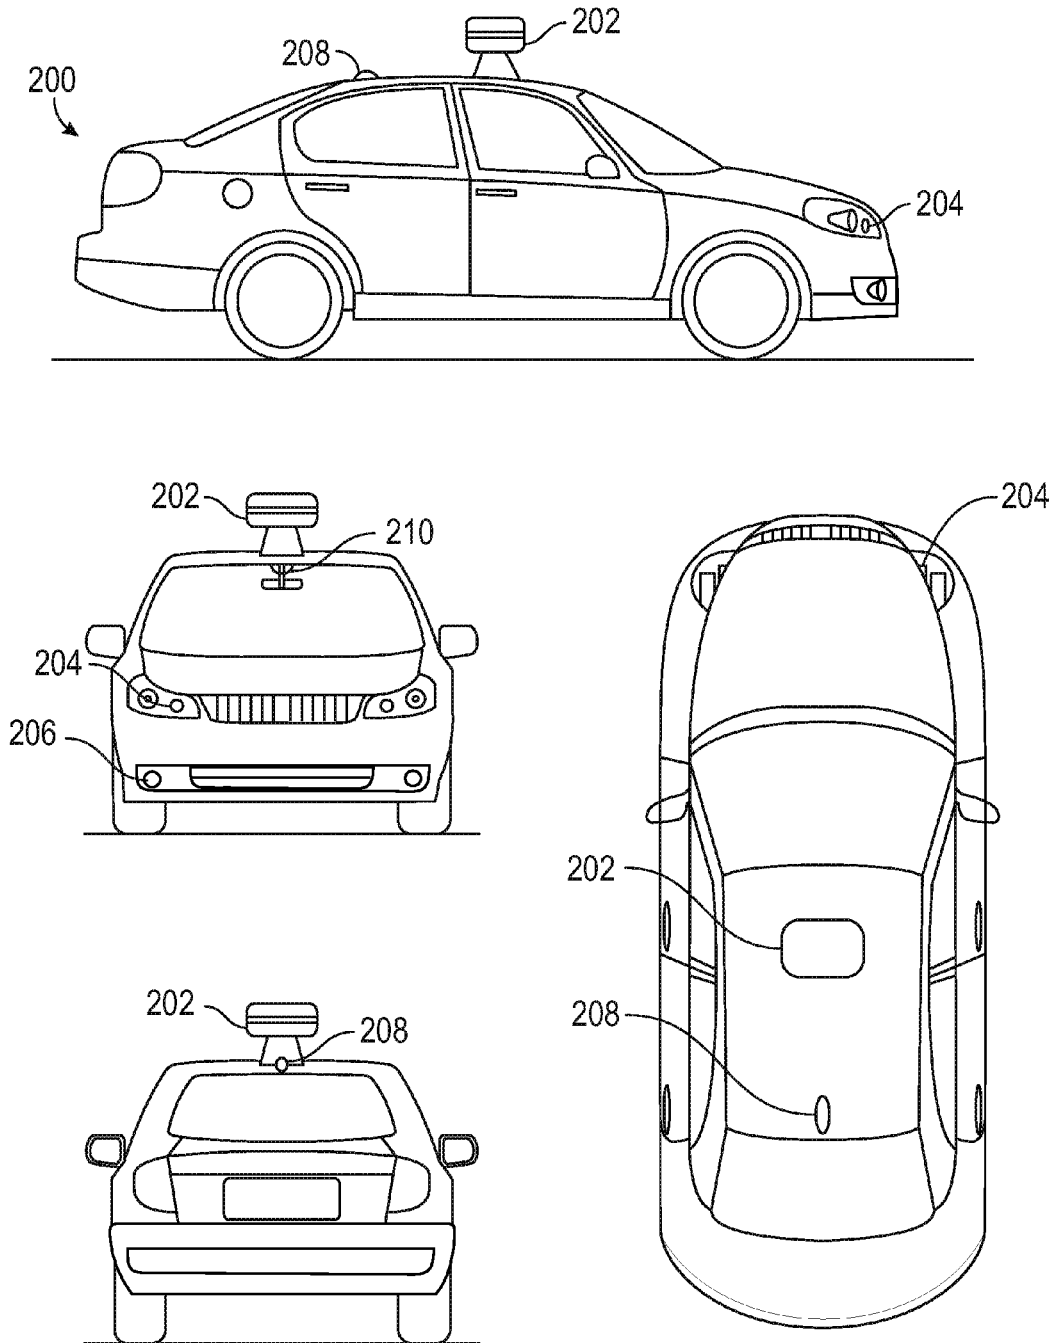


FIG. 2

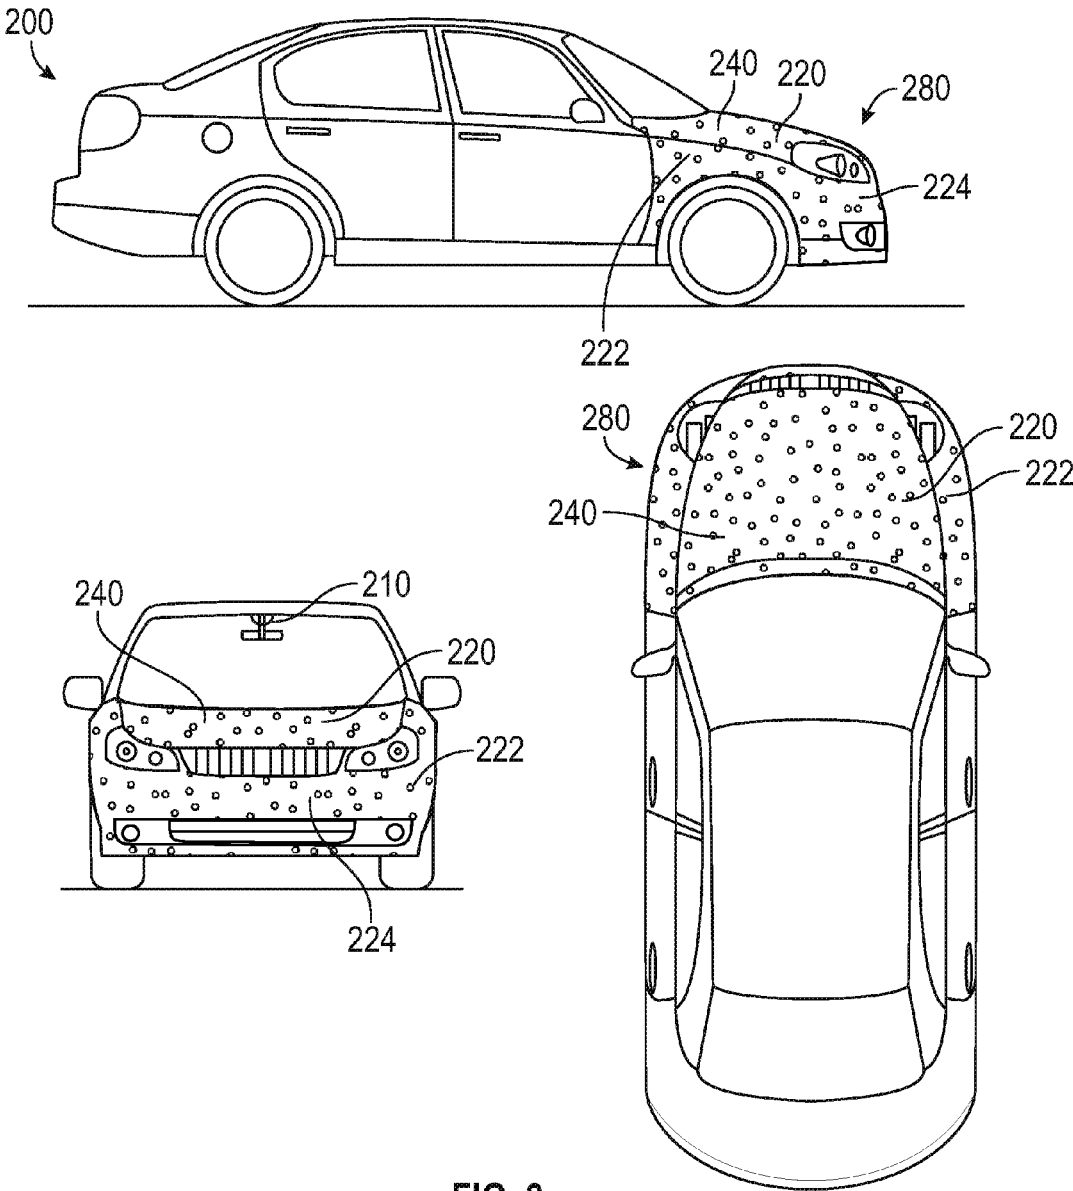


FIG. 3

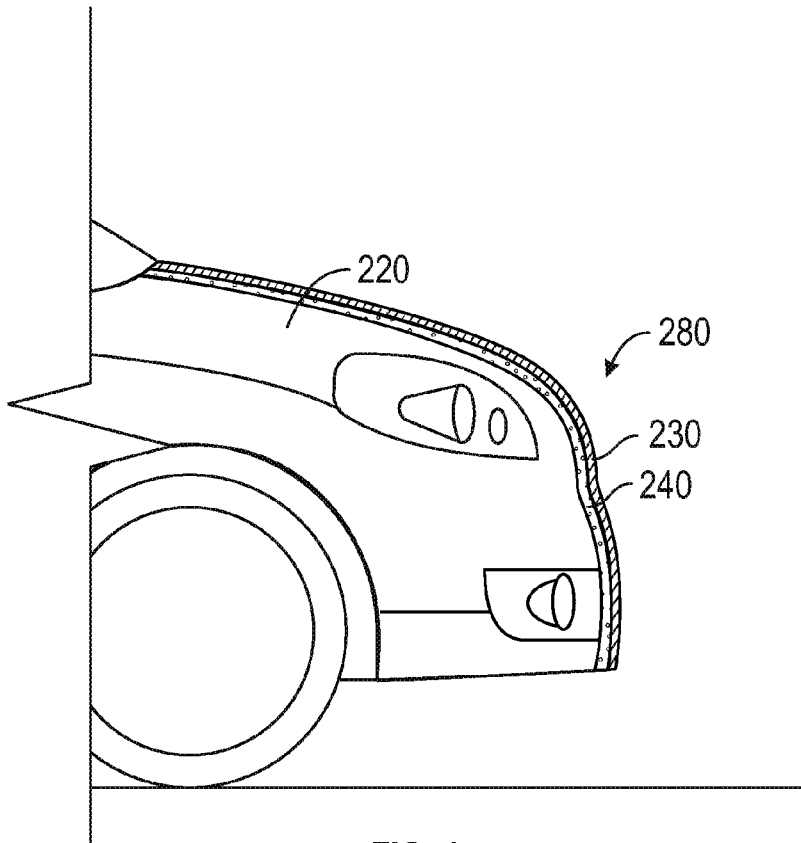


FIG. 4

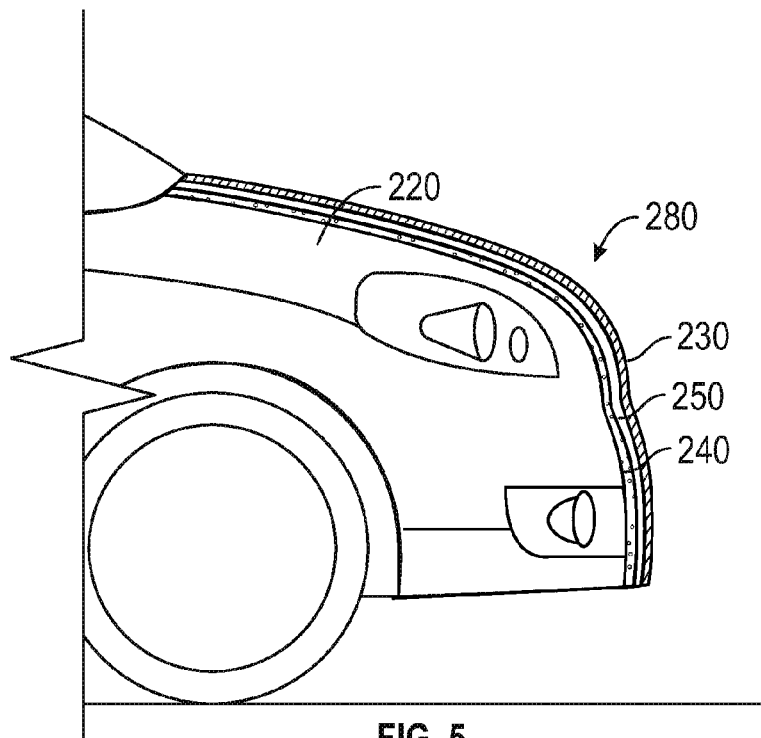


FIG. 5

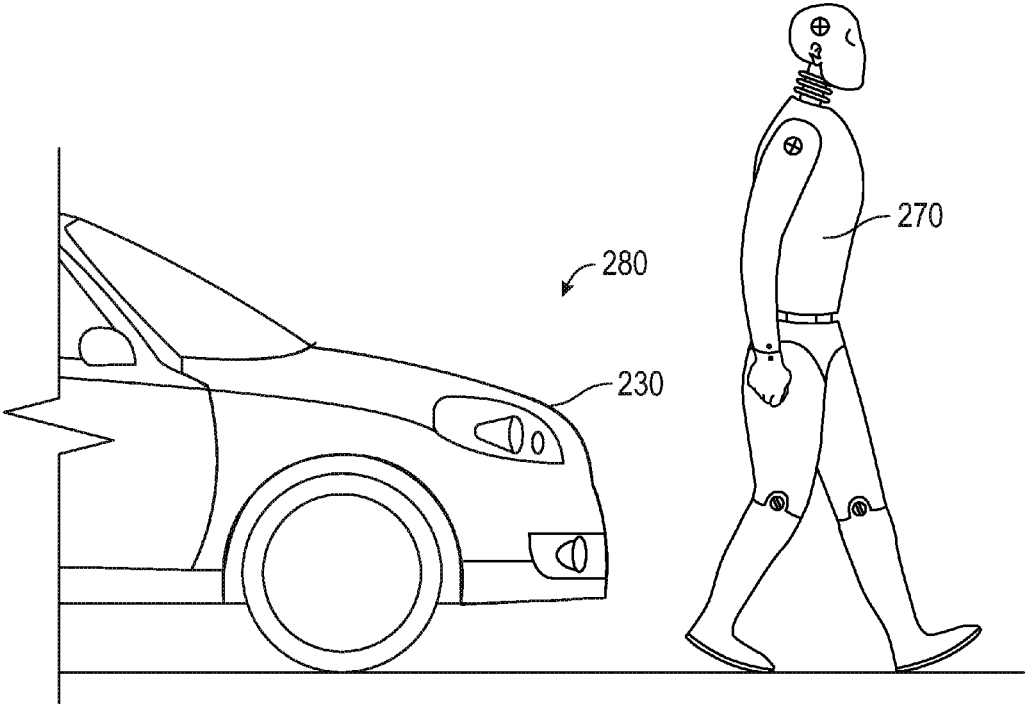


FIG. 6A

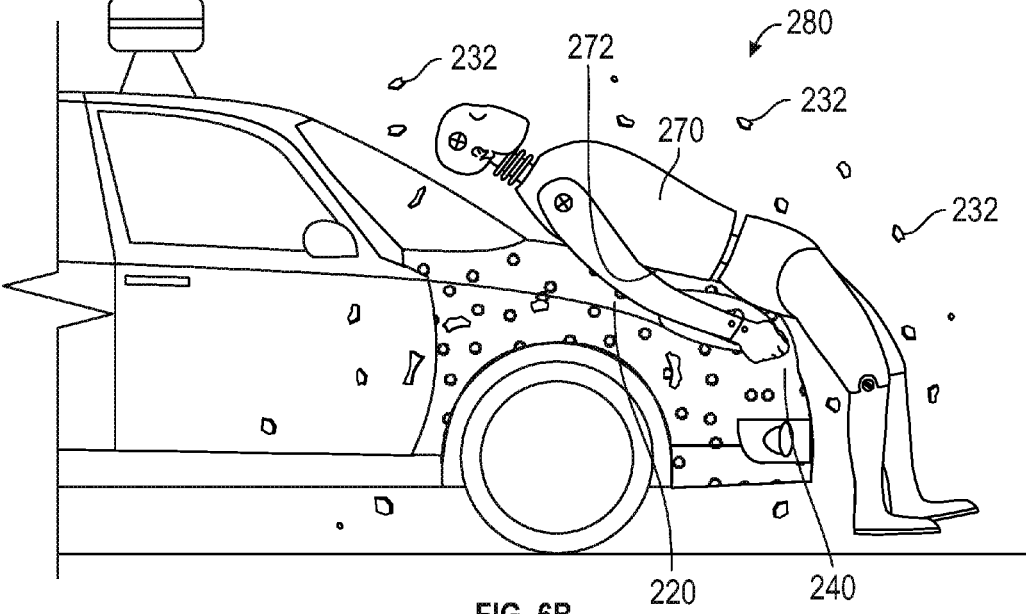


FIG. 6B

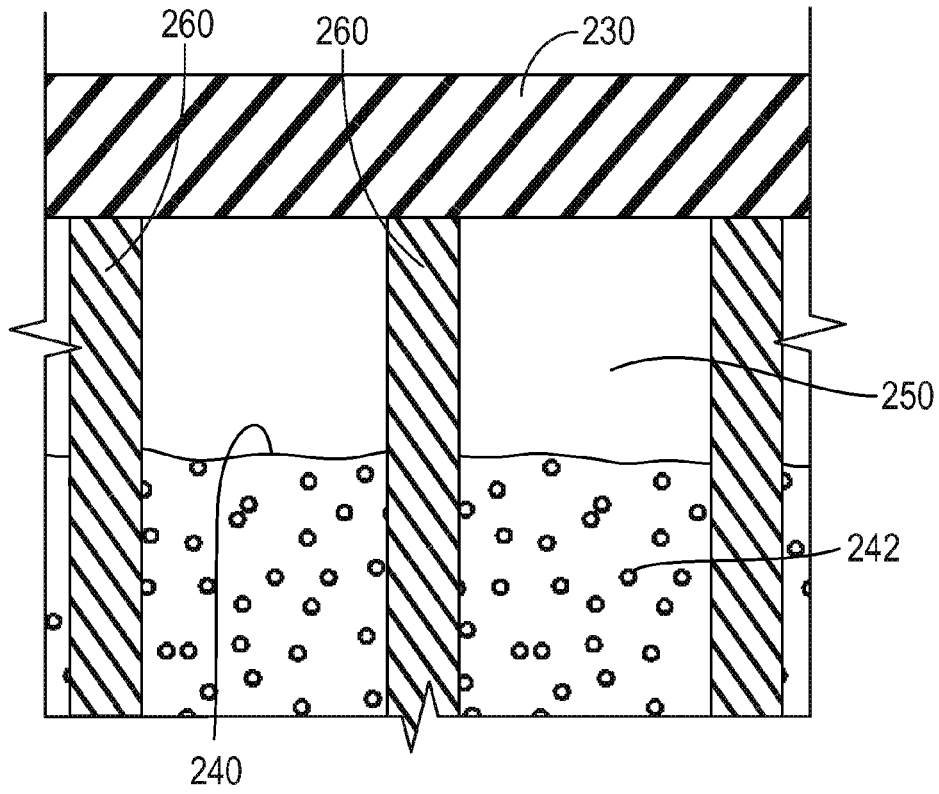


FIG. 7A

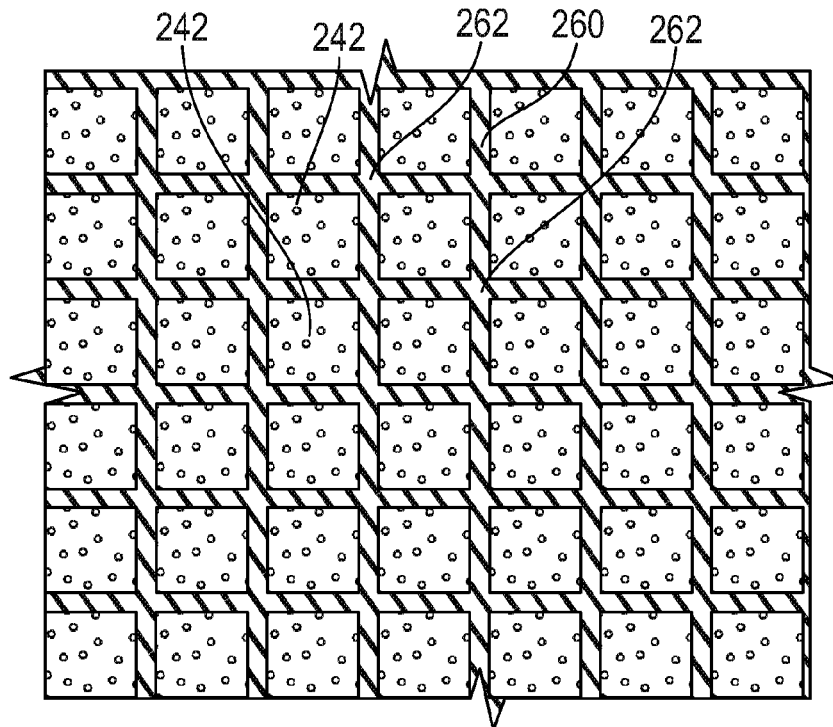


FIG. 7B

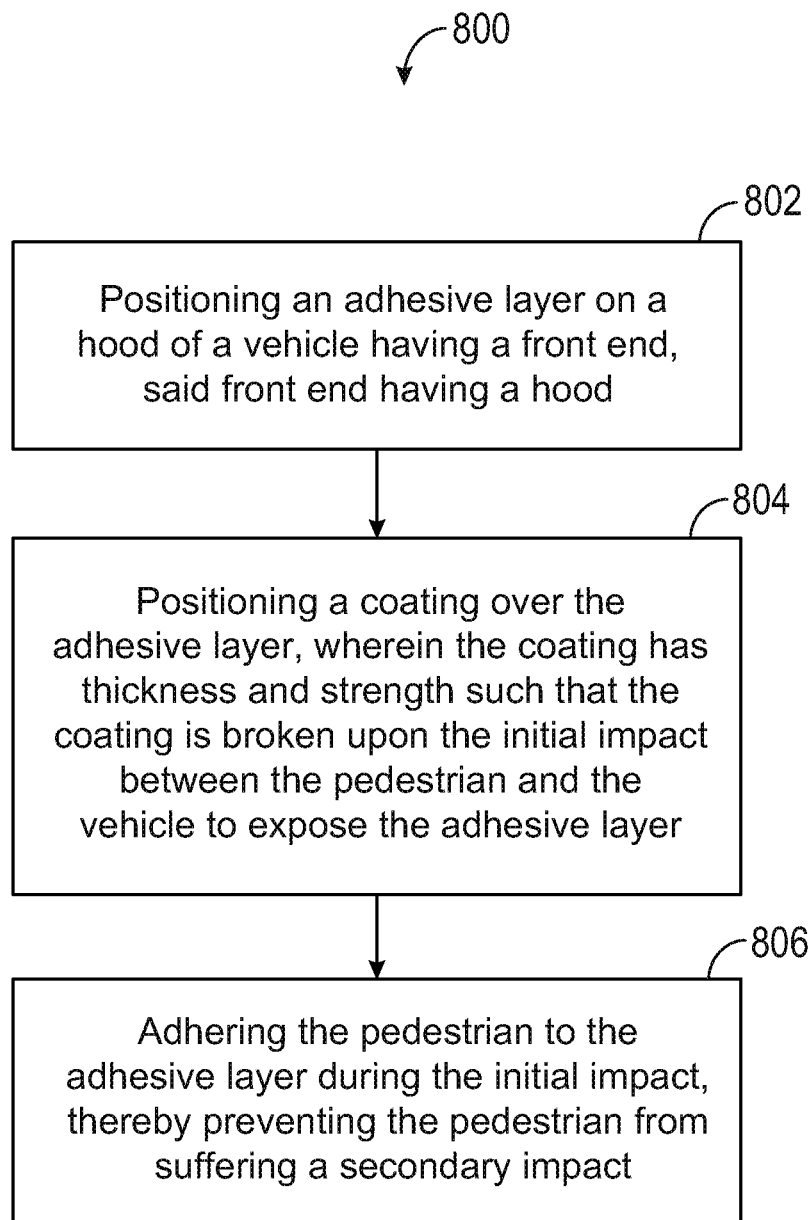


FIG. 8



1

## ADHESIVE VEHICLE FRONT END FOR MITIGATION OF SECONDARY PEDESTRIAN IMPACT

### BACKGROUND

Autonomous vehicles use various computing systems to aid in transporting passengers from one location to another. Some autonomous vehicles may require some initial input or continuous input from an operator, such as a pilot, driver, or passenger. Other systems, for example autopilot systems, may be used only when the system has been engaged, which permits the operator to switch from a manual mode (where the operator exercises a high degree of control over the movement of the vehicle) to an autonomous mode (where the vehicle essentially drives itself) to modes that lie somewhere in between.

Motorized vehicles have been used for over 100 years to transport people and products from one location to another location. On occasion, an accident will occur, for a variety of reasons, where a vehicle will collide with another vehicle or object, or even a person. The collision may cause damage to the driven vehicle or the vehicle or object collided with, and may also cause injury to the occupants of the vehicle or the person collided with. As noted above, some vehicles have been equipped with autopilot systems, which permits the vehicle operator to switch from a manual mode to an autonomous mode or to modes that lie somewhere in between that may serve to prevent and/or reduce vehicle collisions.

As a result of the vehicle accidents that occasionally occur, in addition to the autopilot systems, certain protective features have been installed into vehicles. For example, automobiles have been structurally designed to meet certain crashworthiness standards to protect the occupants of a vehicle involved in a collision. In addition, bumpers have been installed on the front and rear of an automobile to prevent injury to the automobile in the event of a low speed collision. Vehicle bumpers are generally designed to absorb energy to prevent injury to the vehicle during a collision, but generally do not provide significant protection for a pedestrian struck by the vehicle.

Some efforts have been made to provide for the mitigation of injury to a pedestrian in a collision with a vehicle. Such systems include a deployable hood featured on certain Jaguar models which raise the hood a certain amount instantaneously upon impact, thus providing a more compliant surface for the pedestrian to impact. A similar technology featured on Volvo models in Europe deploys an airbag on the exterior of the vehicle at the base of the windshield meant to lessen the severity of the impact between the pedestrian's head and any portion of the vehicle. However, existing technology found in production vehicles does little to mitigate the secondary impact a pedestrian may experience after during a collision with a vehicle.

In the event of a collision between a vehicle and a pedestrian, injury to the pedestrian is often caused not only by the initial impact of the vehicle and the pedestrian, but also by the ensuing, secondary impact between the pedestrian and the road surface or other object. Specifically, when a pedestrian is in a collision with a vehicle, the nature of the collision causes the pedestrian to be carried along with the vehicle for a period of time. As this occurs, the kinetic energy of the moving vehicle accelerates the pedestrian to a certain velocity until the driver of the vehicle reacts to the accident by applying the brakes. At this point, the pedestrian continues travelling at the same velocity but is decoupled or "thrown" from the vehicle where a secondary impact occurs between the pedestrian and

2

the road surface or other object. This secondary impact can often cause severe injuries to the pedestrian as the road surface or other object does not exhibit any sort of compliance or cushioning as the vehicle front end might.

### SUMMARY

The present application discloses embodiments that relate to a system for protecting a pedestrian during impact with a vehicle. The system includes an adhesive layer that is positioned on the hood, front bumper, and/or front side panels of the vehicle. A protective coating is positioned over the adhesive layer. Upon impact with a pedestrian, the coating is broken exposing the adhesive layer. The adhesive bonds the pedestrian to the vehicle so that the pedestrian remains with the vehicle until it stops, and is not thrown from the vehicle, thereby preventing a secondary impact between the pedestrian and the road surface or other object.

In one aspect, a system for protecting a colliding object from a secondary impact, after an initial impact with a vehicle, is provided including a vehicle having a front end, an adhesive layer positioned on the front end of the vehicle, a coating positioned over the adhesive layer, wherein, upon the initial impact between the colliding object and the vehicle, the coating is broken exposing the adhesive layer to adhere the colliding object to the adhesive layer during the initial impact.

In another aspect, a method for protecting a colliding object from a secondary impact, after an initial impact with a vehicle, is provided including the steps of positioning an adhesive layer on a front end of the vehicle, positioning a coating over the adhesive layer, wherein the coating has thickness and strength such that the coating is broken upon the initial impact between the colliding object and the vehicle to expose the adhesive layer, and adhering the colliding object to the adhesive layer during the initial impact, thereby preventing the colliding object from suffering a secondary impact.

In a further aspect, a system for protecting a colliding object from a secondary impact after a collision with a vehicle is provided including means for adhering the colliding object to the vehicle during the collision to prevent the colliding object from being thrown from the vehicle and incurring a secondary impact with the road surface or other object.

The foregoing summary is illustrative only and is not intended to be in any way limiting. In addition to the illustrative aspects, embodiments, and features described above, further aspects, embodiments, and features will become apparent by reference to the figures and the following detailed description.

### BRIEF DESCRIPTION OF THE FIGURES

FIG. 1 is a simplified block diagram of an example automobile.

FIG. 2 illustrates an example automobile having an autonomous mode.

FIG. 3 illustrates a right side view, front view, and top view of the example automobile shown in FIG. 2 having adhesive system 280.

FIG. 4 is a partial cross sectional view the adhesive system 280 shown positioned on the front of the vehicle 200, including coating 230 positioned over adhesive layer 240.

FIG. 5 is another partial cross-sectional view of the adhesive system 280 bumper system 10 shown in FIG. 4, with an air layer 250 positioned between coating 230 and adhesive layer 240.

FIG. 6A is a side view of the front end of vehicle 200 approaching pedestrian 270.

3

FIG. 6B is a side view of the front end of vehicle **200** shown in FIG. 6A during initial impact with pedestrian **270** with adhesive layers **220** and **240** exposed after the coating has been broken into pieces **232**.

FIG. 7A is a partial cross-sectional side view of adhesive system **280** shown in FIG. 5.

FIG. 7B is a partial cross-sectional top view of adhesive system **280** shown in FIG. 5, showing adhesive **242** within lattice supports **260**.

FIG. 8 is a method for protecting a pedestrian from a secondary impact, after an initial impact with a vehicle.

#### DETAILED DESCRIPTION

The following detailed description describes various features and functions of the disclosed systems and methods with reference to the accompanying figures. In the figures, similar symbols identify similar components, unless context dictates otherwise. The illustrative system and method embodiments described herein are not meant to be limiting. It may be readily understood that certain aspects of the disclosed systems and methods can be arranged and combined in a wide variety of different configurations, all of which are contemplated herein.

There are continued efforts to improve vehicle safety, including the development of autonomous vehicle equipped with accident-avoidance systems that will have the ability to avoid all accidents. However, while such systems are being developed, it must be acknowledged that, on occasion, collisions between a vehicle and a pedestrian still occur. Therefore, it is desirable to provide safety mechanisms that reduce or prevent injury to a pedestrian when a collision between a pedestrian and a vehicle does occur. Such safety mechanisms may become unnecessary as accident-avoidance technology is being further developed, but at present it is desirable to provide vehicles with pedestrian safety mechanisms.

In view of the secondary injuries that a pedestrian may suffer during a collision with a vehicle, there is a need to provide a means for eliminating or reducing injury to a pedestrian that could be caused by a secondary impact between the pedestrian and the roadway surface or other object that may occur after the initial impact with the vehicle.

Example embodiments may be directed to a method and system that help to reduce, and hopefully prevent, the secondary impact of a pedestrian against a road surface or another object, which might otherwise occur when a pedestrian is involved in a collision with a moving vehicle. To do so, the front region of the vehicle may be coated with a specialized adhesive that adheres to a pedestrian, and thus holds the pedestrian on the vehicle in the unfortunate event that the front of the vehicle comes into contact with the pedestrian. The adhesion of the pedestrian to the vehicle may prevent the pedestrian from bouncing off the vehicle after the pedestrian impacts the hood. For example, by adhering the pedestrian that comes into contact with the front end, hood, and/or bumper, an example embodiment may prevent the pedestrian from bouncing forward off the front end, hood, and/or bumper, or being vaulted up and over the vehicle, thus helping to prevent injuries from a secondary impact with the road surface or other object that might otherwise occur.

Ideally, the adhesive coating on the front portion of the vehicle may be activated on contact and will be able to adhere to the pedestrian nearly instantaneously. This instantaneous or nearly-instantaneous action may help to constrain the movement of the pedestrian, who may be carried on the front end of the vehicle until the driver of the vehicle (or the vehicle itself in the case of an autonomous vehicle) reacts to the

4

incident and applies the brakes. As such both the vehicle and pedestrian may come to a more gradual stop than if the pedestrian bounces off the vehicle.

In addition, the front portion of the vehicle may be protected from road debris, dirt, water, and other environmental factors by a thin coating applied over the adhesive layer. This “eggshell-like” material may also carry the aesthetic surface finish of the vehicle’s exterior. However, this coating should instantaneously break away in the event of a pedestrian impact, revealing the adhesive layer below, and bonding to the pedestrian. In some embodiments a layer of air may be positioned between the adhesive layer and the thin, frangible coating. It is also desirable to have the adhesive coating release after a short period of time to allow for the removal of the pedestrian from the vehicle.

The use of an adhesive coating on the vehicle may further help to prevent or reduce the possibility of a “tertiary” impact in which a pedestrian who has already been involved in a vehicle collision and been vaulted a certain distance from the vehicle and impacted the roadway, once more collides with a nearby vehicle travelling in the vicinity (or possibly even the same vehicle). By adhering the pedestrian to the front of the vehicle, such a tertiary impact, which could lead to severe injury or even death, may be avoided, thus providing for additional pedestrian safety.

The embodiments of the adhesive coating disclosed herein may be used on any type of vehicle, including conventional automobiles and automobiles having an autonomous mode of operation. In some embodiments, the coating may be applied to an autonomous or semi-autonomous vehicle. However, the term “vehicle” is to be broadly construed to cover any moving object, whether or not motorized, and including a truck, bus, van, semi-trailer truck, motorcycle, golf cart, ATV, off-road vehicle, or farm vehicle, as well as a carrier that rides on a track such as a rollercoaster, trolley, tram, or train car.

Referring now to the Figures, FIG. 1 is a simplified block diagram of an example automobile **100**, in accordance with an example embodiment. Components coupled to or included in the automobile **100** may include a propulsion system **102**, a sensor system **104**, a control system **106**, peripherals **108**, a power supply **110**, a computing device **111**, and a user interface **112**. The computing device **111** may include a processor **113**, and a memory **114**. The computing device **111** may be a controller, or part of the controller, of the automobile **100**. The memory **114** may include instructions **115** executable by the processor **113**, and may also store map data **116**. Components of the automobile **100** may be configured to work in an interconnected fashion with each other and/or with other components coupled to respective systems. For example, the power supply **110** may provide power to all the components of the automobile **100**. The computing device **111** may be configured to receive information from and control the propulsion system **102**, the sensor system **104**, the control system **106**, and the peripherals **108**. The computing device **111** may be configured to generate a display of images on and receive inputs from the user interface **112**.

In other examples, the automobile **100** may include more, fewer, or different systems, and each system may include more, fewer, or different components. Additionally, the systems and components shown may be combined or divided in any number of ways.

The propulsion system **102** may be configured to provide powered motion for the automobile **100**. As shown, the propulsion system **102** includes an engine/motor **118**, an energy source **120**, a transmission **122**, and wheels/tires **124**.

The engine/motor **118** may be or include any combination of an internal combustion engine, an electric motor, a steam

engine, and a Stirling engine. Other motors and engines are possible as well. In some examples, the propulsion system **102** could include multiple types of engines and/or motors. For instance, a gas-electric hybrid car could include a gasoline engine and an electric motor. Other examples are possible.

The energy source **120** may be a source of energy that powers the engine/motor **118** in full or in part. That is, the engine/motor **118** may be configured to convert the energy source **120** into mechanical energy. Examples of energy sources **120** include gasoline, diesel, other petroleum-based fuels, propane, other compressed gas-based fuels, ethanol, solar panels, batteries, and other sources of electrical power. The energy source(s) **120** could additionally or alternatively include any combination of fuel tanks, batteries, capacitors, and/or flywheels. In some examples, the energy source **120** may provide energy for other systems of the automobile **100** as well.

The transmission **122** may be configured to transmit mechanical power from the engine/motor **118** to the wheels/tires **124**. To this end, the transmission **122** may include a gearbox, clutch, differential, drive shafts, and/or other elements. In examples where the transmission **122** includes drive shafts, the drive shafts could include one or more axles that are configured to be coupled to the wheels/tires **124**.

The wheels/tires **124** of automobile **100** could be configured in various formats, including a unicycle, bicycle/motorcycle, tricycle, or car/truck four-wheel format. Other wheel/tire formats are possible as well, such as those including six or more wheels. The wheels/tires **124** of automobile **100** may be configured to rotate differentially with respect to other wheels/tires **124**. In some examples, the wheels/tires **124** may include at least one wheel that is fixedly attached to the transmission **122** and at least one tire coupled to a rim of the wheel that could make contact with the driving surface. The wheels/tires **124** may include any combination of metal and rubber, or combination of other materials.

The propulsion system **102** may additionally or alternatively include components other than those shown.

The sensor system **104** may include a number of sensors configured to sense information about an environment in which the automobile **100** is located. As shown, the sensors of the sensor system include a Global Positioning System (GPS) module **126**, an inertial measurement unit (IMU) **128**, a radio detection and ranging (RADAR) unit **130**, a laser rangefinder and/or light detection and ranging (LIDAR) unit **132**, a camera **134**, and actuators **136** configured to modify a position and/or orientation of the sensors. The sensor system **104** may include additional sensors as well, including, for example, sensors that monitor internal systems of the automobile **100** (e.g., an O<sub>2</sub> monitor, a fuel gauge, an engine oil temperature, etc.). Other sensors are possible as well.

The GPS module **126** may be any sensor configured to estimate a geographic location of the automobile **100**. To this end, the GPS module **126** may include a transceiver configured to estimate a position of the automobile **100** with respect to the Earth, based on satellite-based positioning data. In an example, the computing device **111** may be configured to use the GPS module **126** in combination with the map data **116** to estimate a location of a lane boundary on road on which the automobile **100** may be travelling on. The GPS module **126** may take other forms as well.

The IMU **128** may be any combination of sensors configured to sense position and orientation changes of the automobile **100** based on inertial acceleration. In some examples, the

combination of sensors may include, for example, accelerometers and gyroscopes. Other combinations of sensors are possible as well.

The RADAR unit **130** may be considered as an object detection system that may be configured to use radio waves to determine characteristics of the object such as range, altitude, direction, or speed of the object. The RADAR unit **130** may be configured to transmit pulses of radio waves or microwaves that may bounce off any object in a path of the waves. The object may return a part of energy of the waves to a receiver (e.g., dish or antenna), which may be part of the RADAR unit **130** as well. The RADAR unit **130** also may be configured to perform digital signal processing of received signals (bouncing off the object) and may be configured to identify the object.

Other systems similar to RADAR have been used in other parts of the electromagnetic spectrum. One example is LIDAR (light detection and ranging), which may be configured to use visible light from lasers rather than radio waves.

The LIDAR unit **132** may include a sensor configured to sense or detect objects in an environment in which the automobile **100** is located using light. Generally, LIDAR is an optical remote sensing technology that can measure distance to, or other properties of, a target by illuminating the target with light. As an example, the LIDAR unit **132** may include a laser source and/or laser scanner configured to emit laser pulses and a detector configured to receive reflections of the laser pulses. For example, the LIDAR unit **132** may include a laser range finder reflected by a rotating mirror, and the laser is scanned around a scene being digitized, in one or two dimensions, gathering distance measurements at specified angle intervals. In examples, the LIDAR unit **132** may include components such as light (e.g., laser) source, scanner and optics, photo-detector and receiver electronics, and position and navigation system.

In an example, The LIDAR unit **132** may be configured to use ultraviolet (UV), visible, or infrared light to image objects and can be used with a wide range of targets, including non-metallic objects. In one example, a narrow laser beam can be used to map physical features of an object with high resolution.

In examples, wavelengths in a range from about 10 micrometers (infrared) to about 250 nm (UV) could be used. Typically light is reflected via backscattering. Different types of scattering are used for different LIDAR applications, such as Rayleigh scattering, Mie scattering and Raman scattering, as well as fluorescence. Based on different kinds of backscattering, LIDAR can be accordingly called Rayleigh LIDAR, Mie LIDAR, Raman LIDAR and Na/Fe/K Fluorescence LIDAR, as examples. Suitable combinations of wavelengths can allow for remote mapping of objects by looking for wavelength-dependent changes in intensity of reflected signals, for example.

Three-dimensional (3D) imaging can be achieved using both scanning and non-scanning LIDAR systems. "3D gated viewing laser radar" is an example of a non-scanning laser ranging system that applies a pulsed laser and a fast gated camera. Imaging LIDAR can also be performed using an array of high speed detectors and a modulation sensitive detectors array typically built on single chips using CMOS (complementary metal-oxide-semiconductor) and hybrid CMOS/CCD (charge-coupled device) fabrication techniques. In these devices, each pixel may be processed locally by demodulation or gating at high speed such that the array can be processed to represent an image from a camera. Using this technique, many thousands of pixels may be acquired

simultaneously to create a 3D point cloud representing an object or scene being detected by the LIDAR unit **132**.

A point cloud may include a set of vertices in a 3D coordinate system. These vertices may be defined by X, Y, and Z coordinates, for example, and may represent an external surface of an object. The LIDAR unit **132** may be configured to create the point cloud by measuring a large number of points on the surface of the object, and may output the point cloud as a data file. As the result of a 3D scanning process of the object by the LIDAR unit **132**, the point cloud can be used to identify and visualize the object.

In one example, the point cloud can be directly rendered to visualize the object. In another example, the point cloud may be converted to polygon or triangle mesh models through a process that may be referred to as surface reconstruction. Example techniques for converting a point cloud to a 3D surface may include Delaunay triangulation, alpha shapes, and ball pivoting. These techniques include building a network of triangles over existing vertices of the point cloud. Other example techniques may include converting the point cloud into a volumetric distance field and reconstructing an implicit surface so defined through a marching cubes algorithm.

The camera **134** may be any camera (e.g., a still camera, a video camera, etc.) configured to capture images of the environment in which the automobile **100** is located. To this end, the camera may be configured to detect visible light, or may be configured to detect light from other portions of the spectrum, such as infrared or ultraviolet light. Other types of cameras are possible as well. The camera **134** may be a two-dimensional detector, or may have a three-dimensional spatial range. In some examples, the camera **134** may be, for example, a range detector configured to generate a two-dimensional image indicating a distance from the camera **134** to a number of points in the environment. To this end, the camera **134** may use one or more range detecting techniques. For example, the camera **134** may be configured to use a structured light technique in which the automobile **100** illuminates an object in the environment with a predetermined light pattern, such as a grid or checkerboard pattern and uses the camera **134** to detect a reflection of the predetermined light pattern off the object. Based on distortions in the reflected light pattern, the automobile **100** may be configured to determine the distance to the points on the object. The predetermined light pattern may comprise infrared light, or light of another wavelength.

The actuators **136** may, for example, be configured to modify a position and/or orientation of the sensors.

The sensor system **104** may additionally or alternatively include components other than those shown.

The control system **106** may be configured to control operation of the automobile **100** and its components. To this end, the control system **106** may include a steering unit **138**, a throttle **140**, a brake unit **142**, a sensor fusion algorithm **144**, a computer vision system **146**, a navigation or pathing system **148**, and an obstacle avoidance system **150**.

The steering unit **138** may be any combination of mechanisms configured to adjust the heading or direction of the automobile **100**.

The throttle **140** may be any combination of mechanisms configured to control the operating speed and acceleration of the engine/motor **118** and, in turn, the speed and acceleration of the automobile **100**.

The brake unit **142** may be any combination of mechanisms configured to decelerate the automobile **100**. For example, the brake unit **142** may use friction to slow the wheels/tires **124**. As another example, the brake unit **142** may

be configured to be regenerative and convert the kinetic energy of the wheels/tires **124** to electric current. The brake unit **142** may take other forms as well.

The sensor fusion algorithm **144** may include an algorithm (or a computer program product storing an algorithm) executable by the computing device **111**, for example. The sensor fusion algorithm **144** may be configured to accept data from the sensor system **104** as an input. The data may include, for example, data representing information sensed at the sensors of the sensor system **104**. The sensor fusion algorithm **144** may include, for example, a Kalman filter, a Bayesian network, or another algorithm. The sensor fusion algorithm **144** further may be configured to provide various assessments based on the data from the sensor system **104**, including, for example, evaluations of individual objects and/or features in the environment in which the automobile **100** is located, evaluations of particular situations, and/or evaluations of possible impacts based on particular situations. Other assessments are possible as well.

The computer vision system **146** may be any system configured to process and analyze images captured by the camera **134** in order to identify objects and/or features in the environment in which the automobile **100** is located, including, for example, lane information, traffic signals and obstacles. To this end, the computer vision system **146** may use an object recognition algorithm, a Structure from Motion (SFM) algorithm, video tracking, or other computer vision techniques. In some examples, the computer vision system **146** may additionally be configured to map the environment, track objects, estimate speed of objects, etc.

The navigation and pathing system **148** may be any system configured to determine a driving path for the automobile **100**. The navigation and pathing system **148** may additionally be configured to update the driving path dynamically while the automobile **100** is in operation. In some examples, the navigation and pathing system **148** may be configured to incorporate data from the sensor fusion algorithm **144**, the GPS module **126**, and one or more predetermined maps so as to determine the driving path for the automobile **100**.

The obstacle avoidance system **150** may be any system configured to identify, evaluate, and avoid or otherwise negotiate obstacles in the environment in which the automobile **100** is located.

The control system **106** may additionally or alternatively include components other than those shown.

Peripherals **108** may be configured to allow the automobile **100** to interact with external sensors, other automobiles, and/or a user. To this end, the peripherals **108** may include, for example, a wireless communication system **152**, a touchscreen **154**, a microphone **156**, and/or a speaker **158**.

The wireless communication system **152** may be any system configured to be wirelessly coupled to one or more other automobiles, sensors, or other entities, either directly or via a communication network. To this end, the wireless communication system **152** may include an antenna and a chipset for communicating with the other automobiles, sensors, or other entities either directly or over an air interface. The chipset or wireless communication system **152** in general may be arranged to communicate according to one or more other types of wireless communication (e.g., protocols) such as Bluetooth, communication protocols described in IEEE 802.11 (including any IEEE 802.11 revisions), cellular technology (such as GSM, CDMA, UMTS, EV-DO, WiMAX, or LTE), Zigbee, dedicated short range communications (DSRC), and radio frequency identification (RFID) communications, among other possibilities. The wireless communication system **152** may take other forms as well.

The touchscreen **154** may be used by a user to input commands to the automobile **100**. To this end, the touchscreen **154** may be configured to sense at least one of a position and a movement of a user's finger via capacitive sensing, resistance sensing, or a surface acoustic wave process, among other possibilities. The touchscreen **154** may be capable of sensing finger movement in a direction parallel or planar to the touchscreen surface, in a direction normal to the touchscreen surface, or both, and may also be capable of sensing a level of pressure applied to the touchscreen surface. The touchscreen **154** may be formed of one or more translucent or transparent insulating layers and one or more translucent or transparent conducting layers. The touchscreen **154** may take other forms as well.

The microphone **156** may be configured to receive audio (e.g., a voice command or other audio input) from a user of the automobile **100**. Similarly, the speakers **158** may be configured to output audio to the user of the automobile **100**.

The peripherals **108** may additionally or alternatively include components other than those shown.

The power supply **110** may be configured to provide power to some or all of the components of the automobile **100**. To this end, the power supply **110** may include, for example, a rechargeable lithium-ion or lead-acid battery. In some examples, one or more banks of batteries could be configured to provide electrical power. Other power supply materials and configurations are possible as well. In some examples, the power supply **110** and energy source **120** may be implemented together, as in some all-electric cars.

The processor **113** included in the computing device **111** may comprise one or more general-purpose processors and/or one or more special-purpose processors (e.g., image processor, digital signal processor, etc.). To the extent that the processor **113** includes more than one processor, such processors could work separately or in combination. The computing device **111** may be configured to control functions of the automobile **100** based on input received through the user interface **112**, for example.

The memory **114**, in turn, may comprise one or more volatile and/or one or more non-volatile storage components, such as optical, magnetic, and/or organic storage, and the memory **114** may be integrated in whole or in part with the processor **113**. The memory **114** may contain the instructions **115** (e.g., program logic) executable by the processor **113** to execute various automobile functions, including any of the functions or methods described herein.

The components of the automobile **100** could be configured to work in an interconnected fashion with other components within and/or outside their respective systems. To this end, the components and systems of the automobile **100** may be communicatively linked together by a system bus, network, and/or other connection mechanism (not shown).

Further, while each of the components and systems is shown to be integrated in the automobile **100**, in some examples, one or more components or systems may be removably mounted on or otherwise connected (mechanically or electrically) to the automobile **100** using wired or wireless connections.

The automobile **100** may include one or more elements in addition to or instead of those shown. For example, the automobile **100** may include one or more additional interfaces and/or power supplies. Other additional components are possible as well. In these examples, the memory **114** may further include instructions executable by the processor **113** to control and/or communicate with the additional components.

FIG. 2 illustrates an example automobile **200**, in accordance with an embodiment. In particular, FIG. 2 shows a

Right Side View, Front View, Back View, and Top View of the automobile **200**. Although automobile **200** is illustrated in FIG. 2 as a car, other examples are possible. For instance, the automobile **200** could represent a truck, a van, a semi-trailer truck, a motorcycle, a golf cart, an off-road vehicle, or a farm vehicle, among other examples. As shown, the automobile **200** includes a first sensor unit **202**, a second sensor unit **204**, a third sensor unit **206**, a wireless communication system **208**, and a camera **210**.

Each of the first, second, and third sensor units **202-206** may include any combination of global positioning system sensors, inertial measurement units, RADAR units, LIDAR units, cameras, lane detection sensors, and acoustic sensors. Other types of sensors are possible as well.

While the first, second, and third sensor units **202** are shown to be mounted in particular locations on the automobile **200**, in some examples the sensor unit **202** may be mounted elsewhere on the automobile **200**, either inside or outside the automobile **200**. Further, while only three sensor units are shown, in some examples more or fewer sensor units may be included in the automobile **200**.

In some examples, one or more of the first, second, and third sensor units **202-206** may include one or more movable mounts on which the sensors may be movably mounted. The movable mount may include, for example, a rotating platform. Sensors mounted on the rotating platform could be rotated so that the sensors may obtain information from each direction around the automobile **200**. Alternatively or additionally, the movable mount may include a tilting platform. Sensors mounted on the tilting platform could be tilted within a particular range of angles and/or azimuths so that the sensors may obtain information from a variety of angles. The movable mount may take other forms as well.

Further, in some examples, one or more of the first, second, and third sensor units **202-206** may include one or more actuators configured to adjust the position and/or orientation of sensors in the sensor unit by moving the sensors and/or movable mounts. Example actuators include motors, pneumatic actuators, hydraulic pistons, relays, solenoids, and piezoelectric actuators. Other actuators are possible as well.

The wireless communication system **208** may be any system configured to wirelessly couple to one or more other automobiles, sensors, or other entities, either directly or via a communication network as described above with respect to the wireless communication system **152** in FIG. 1. While the wireless communication system **208** is shown to be positioned on a roof of the automobile **200**, in other examples the wireless communication system **208** could be located, fully or in part, elsewhere.

The camera **210** may be any camera (e.g., a still camera, a video camera, etc.) configured to capture images of the environment in which the automobile **200** is located. To this end, the camera **210** may take any of the forms described above with respect to the camera **134** in FIG. 1. While the camera **210** is shown to be mounted inside a front windshield of the automobile **200**, in other examples the camera **210** may be mounted elsewhere on the automobile **200**, either inside or outside the automobile **200**.

The automobile **200** may include one or more other components in addition to or instead of those shown.

A control system of the automobile **200** may be configured to control the automobile **200** in accordance with a control strategy from among multiple possible control strategies. The control system may be configured to receive information from sensors coupled to the automobile **200** (on or off the automobile **200**), modify the control strategy (and an associated driving behavior) based on the information, and control

11

the automobile **200** in accordance with the modified control strategy. The control system further may be configured to monitor the information received from the sensors, and continuously evaluate driving conditions; and also may be configured to modify the control strategy and driving behavior based on changes in the driving conditions.

FIG. 3 illustrates a right side view, front view, and top view of the example automobile **200** shown in FIG. 2 equipped with an adhesive system **280**. In particular, the adhesive system **280** includes an adhesive layer **240** positioned on the hood **220** of vehicle **200**, as well as on a front bumper **224** of the vehicle **200**, and on the front side panels **222** of vehicle **200**. In a preferred embodiment, the adhesive layer **240** covers the hood, front bumper, and front side panels. However, in some applications only the hood of the vehicle includes an adhesive layer. As shown in FIGS. 4 and 5, a coating **230** is positioned over the adhesive layer **240**, however in FIG. 3, for illustrative purposes the adhesive system **280** is shown without coating **230**.

The adhesive layer **240** may be positioned over the existing front hood, front bumper, and/or side panels of a vehicle. Thus, the adhesive layer **240** could be advantageously added onto an existing vehicle. Alternately, the adhesive layer **240** could be formed as part of a specifically designed hood, front bumper, and/or front side panel of a vehicle. In some applications, it may also be desirable to provide an adhesive layer on the windshield of the vehicle. For example, a layer of adhesive could be sandwiched within the windshield of the vehicle, as the windshield often takes considerable impact in the event of a collision with an object. Upon impact, the windshield glass could break, exposing the adhesive layer within the windshield.

FIG. 4 is a partial cross sectional view the adhesive system **280** shown positioned on the front of the vehicle **200**. In particular, adhesive layer **240** is shown positioned over hood **220**, and a coating **230** is positioned over adhesive layer **240**. The coating **230** is designed to protect the hood **220** and adhesive layer **240** from road debris, dirt, water, and other environmental factors. The coating **230** may also carry the aesthetic surface finish of the vehicle's exterior. However, the coating **230** is a frangible or "eggshell-like" material that is designed to break into pieces during impact with a pedestrian to expose the adhesive layer **230**. The exposed adhesive layer **230** bonds the pedestrian to the vehicle during initial impact with the pedestrian.

FIG. 5 is another partial cross-sectional view of the adhesive system **280** bumper system **10** shown in FIG. 4, with an air layer **250** positioned between coating **230** and adhesive layer **240**. The air layer **250** may be useful for proper operation of the adhesive and also for helping to expose the adhesive layer **240** upon initial impact with a pedestrian.

FIG. 6A is a side view of the front end of vehicle **200** and pedestrian **270**. FIG. 6B is a side view of the front end of vehicle **200** shown in FIG. 6A during initial impact with pedestrian **270**. In FIG. 6B, the coating **230** has been broken into pieces **232**. Preferably, the pieces **232** are of a relatively small size, such as less than an inch in diameter, on average. The smaller pieces **232** help to expose the adhesive layers **220** and **240** so that they come into contact with, and bond to, the pedestrian **270**. As shown in FIG. 6B, the back **272** of pedestrian **270** contacts adhesive layer **220** and the pedestrian **270** is thereby adhered to the vehicle during the initial impact.

Ideally, the adhesive layer on the front portion of the vehicle will be activated on contact and will be able to adhere to the pedestrian nearly instantaneously. This instantaneous action will constrain the movement of the pedestrian and carry the victim on the front end of the vehicle until the driver

12

of the vehicle reacts to the incident and applies the brakes, bringing both vehicle and pedestrian to a safe stop. Thus, the adhesive layer may be formed of a quick acting adhesive. The adhesive may also comprise a contact adhesive or a pressure sensitive adhesive. In addition, in some embodiments the adhesive layer may be formed of a viscous layer of adhesive that flows to between broken pieces of the coating to expose the adhesive to the pedestrian. Furthermore, the adhesive in the adhesive layer may be a very sticky material and operate in a manner similar to flypaper, or double-sided duct tape. It is also desirable to have the adhesive in the adhesive layer release after a short period of time to allow for the removal of the pedestrian from the vehicle.

FIG. 7A is a partial cross-sectional side view of adhesive system **280** shown in FIG. 5. Coating **230** is supported above adhesive layer **240** with supports **260** to form an air layer **250** between the coating **230** and the adhesive layer **240**. It will be appreciated that the thickness of the coating **230**, the air layer **250**, and the adhesive layer **230** can be varied as desired. In some embodiments the thickness of the air layer **250** may be greater than or less than the thickness of the adhesive layer **240**, and may also have a thickness that is equal to the thickness of the adhesive layer **240** to provide a desired amount of adhesive **242** and desired distance between adhesive layer **240** and coating **230**.

FIG. 7B is a partial cross-sectional top view of adhesive system **280** shown in FIG. 5, showing adhesive **242** within lattice supports **260**. As noted above, different types of adhesive **242** may be used. In addition, coating **230** may contact the adhesive **242** only at isolated points, such as intersections **262** of supports **260**. In other words, in some embodiments only the point beneath intersections **262** may extend into the adhesive **242**, to increase the area of the air layer to allow for potential flow of the adhesive **242** during initial impact with a pedestrian.

FIG. 8 is directed to method **800** for protecting a pedestrian from a secondary impact, after an initial impact with a vehicle, comprising the step **802** of positioning an adhesive layer on a hood of a vehicle having a front end, said front end having a hood, the step **804** of positioning a coating over the adhesive layer, wherein the coating has thickness and strength such that the coating is broken upon the initial impact between the pedestrian and the vehicle to expose the adhesive layer, and Step **806** of adhering the pedestrian to the adhesive layer during the initial impact, thereby preventing the pedestrian from suffering a secondary impact.

The disclosed embodiments provide a system and method for preventing the secondary impact of a pedestrian and a road surface or other object that may occur after an initial impact with a moving vehicle. The adhesive layer bonds or adheres to the pedestrian so that the pedestrian remains "stuck" to the vehicle and is not "thrown" from the vehicle where injuries may be caused by a secondary impact with the road surface or other object. Thus, the pedestrian is adhered to the vehicle and carried on the vehicle until the vehicle comes to a stop. Secondary pedestrian impacts lead to a large portion of severe injuries in road accidents. Therefore, the disclosed embodiments have the capability of significantly increasing safety and saving lives. This technology has the potential to make the biggest impact in extremely congested urban areas such as large cities due where there are a large number of pedestrians present.

The disclosed adhesive systems also help to prevent or reduce the possibility of a potential "tertiary" impact in which a pedestrian initially impacts a vehicle, is "thrown" from the vehicle where a secondary impact with the roadway occurs, and collides once more with a nearby vehicle travelling in the

13

vicinity. Thus, the disclosed embodiments further help to prevent or reduce such tertiary impacts which could lead to severe injury or even death, providing for additional pedestrian safety.

It will be appreciated that the adhesive systems described above could be used with a wide variety of different vehicles. However, it may be particularly advantageous to provide a vehicle having an autonomous mode of operation with the above-described adhesive systems. Furthermore, the adhesive systems have been described with respect to a vehicle colliding with a pedestrian. The term “pedestrian” as used herein includes any kind of person. However, the adhesive systems may be used for collisions between a vehicle and other colliding objects as well. For example, as used herein, a “colliding object” may include a pedestrian, as well, as other objects such as a bicycle or animal.

While various aspects and embodiments have been disclosed herein, other aspects and embodiments will be apparent to those skilled in the art. The various aspects and embodiments disclosed herein are for purposes of illustration and are not intended to be limiting, with the true scope being indicated by the following claims, along with the full scope of equivalents to which such claims are entitled. It is also to be understood that the terminology used herein is for the purpose of describing particular embodiments only, and is not intended to be limiting.

What is claimed is:

1. A system for protecting a colliding object from a secondary impact, after an initial impact with a vehicle, comprising:
  - a vehicle having a front end,
  - an adhesive layer positioned on the front end of the vehicle;
  - a coating positioned over the adhesive layer;
  - wherein one or more layers of air are positioned between the coating and the adhesive layer; and
  - wherein, upon the initial impact between the colliding object and the vehicle, the coating is broken exposing the adhesive layer to adhere the colliding object to the adhesive layer during the initial impact.
2. The system of claim 1, wherein the adhesive layer comprises a quick acting adhesive.
3. The system of claim 1, wherein the adhesive layer comprises a contact adhesive.
4. The system of claim 1, wherein the adhesive layer comprises a pressure sensitive adhesive.
5. The system of claim 1, wherein the adhesive layer comprises a viscous layer of adhesive.
6. The system of claim 1, wherein the adhesive layer comprises a releasable adhesive so that the colliding object may be decoupled from the adhesive layer after a period of time.
7. The system of claim 1, wherein the coating is comprised of a frangible material.
8. The system of claim 1, wherein the coating contacts the adhesive layer at isolated locations to provide the one or more layers of air.

14

9. The system of claim 1, wherein a thickness of the one or more layers of air is greater than a thickness of the adhesive layer.

10. The system of claim 1, wherein a thickness of the one or more layers of air is equal to a thickness of the adhesive layer.

11. The system of claim 1, wherein the adhesive layer and the coating extends beyond a hood and onto front side panels of the vehicle.

12. The system of claim 1, wherein a second adhesive layer extends over a vehicle bumper positioned on the front end of the vehicle, and a second coating is positioned over the second adhesive layer.

13. The system of claim 1, wherein a lower surface of the coating is in contact with the one or more layers of air prior to the initial impact.

14. The system of claim 1, the adhesive layer comprises a viscous layer of adhesive that, upon impact, is caused to flow between pieces of the broken coating to come into contact with the colliding object.

15. The system of claim 14, wherein the viscous layer of adhesive is positioned within a lattice structure that supports the coating above the viscous layer of adhesive.

16. A method for protecting a colliding object from a secondary impact, after an initial impact with a vehicle, comprising the steps of:

- positioning an adhesive layer on a hood of a vehicle having a front end;
- positioning a coating over the adhesive layer, wherein the coating has a thickness and strength such that the coating is broken upon the initial impact between the colliding object and the vehicle to expose the adhesive layer;
- positioning one or more layers of air between the adhesive layer and the coating; and
- adhering the colliding object to the adhesive layer during the initial impact, thereby preventing the colliding object from suffering the secondary impact.

17. The method of claim 16, further including the step of releasing the colliding object from the adhesive layer.

- 18. The method of claim 16, further including the steps of:
  - positioning a second adhesive layer on a vehicle bumper positioned on a front end of the vehicle;
  - positioning a second coating over the second adhesive layer, wherein the second coating has a thickness and strength such that the second coating is broken upon the initial impact between the colliding object and the vehicle to expose the second adhesive layer; and
  - adhering the colliding object to the second adhesive layer during the initial impact.

19. The method of claim 16, wherein a lower surface of the coating is in contact with the one or more layers of air prior to the initial impact.

\* \* \* \* \*